


3514-WFHDF

Submitted Model No.: _____

Specific Features: _____

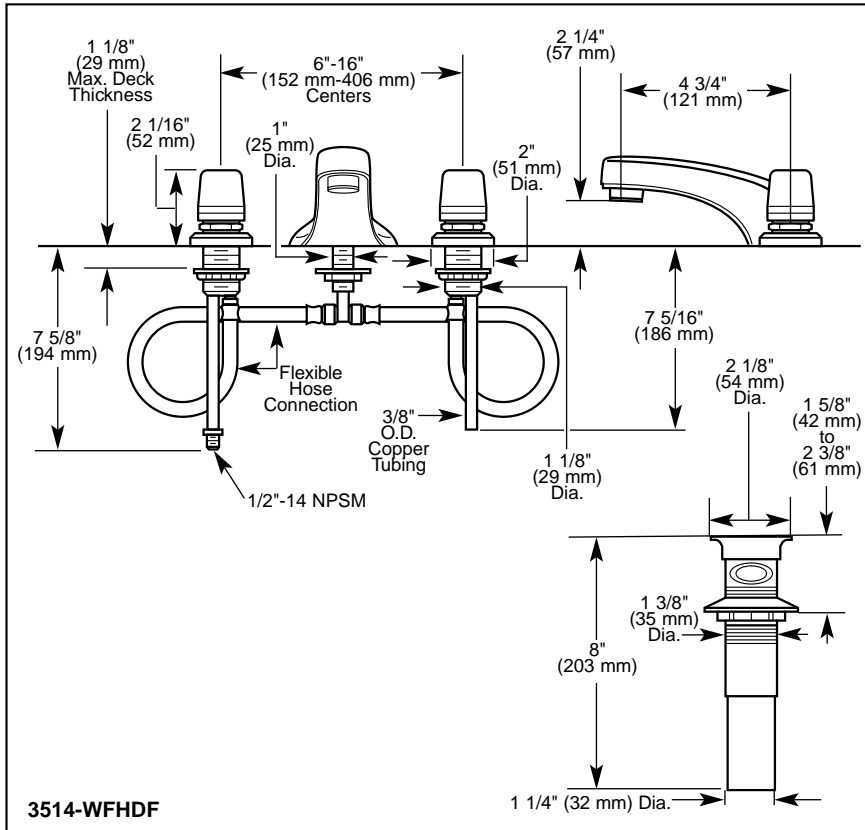

3514-WFHDF

- Two Handle
- Widespread
- Slow Self-Closing
- Three Hole Sink Applications
- 6"-16" (152 mm-406 mm) Centers


STANDARD SPECIFICATIONS:

- Two handle, slow self-closing faucets for three hole deck mount applications.
- Widespread 6"-16" (152 mm-406 mm) centers.
- Solid brass fabricated end valve and spout bodies.
- No lift rod hole.
- Metal grid strainer.
- Metering, vandal resistant, slow-close push handles.
- 4 3/4" (121 mm) long, rigid spout.
- .5 gpm (1.9 L/min) vandal resistant spray outlet. Total flow per actuation must not exceed .25 gal./cycle (1.0 L/cycle).
- All operating parts must be replaceable from above the deck.
- 3/8" O.D. copper supply tube inlets with 1/2"-14 NPSM adapters.



COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- ASHRAE 90-80
- IAPMO Listed
- CSA Certified

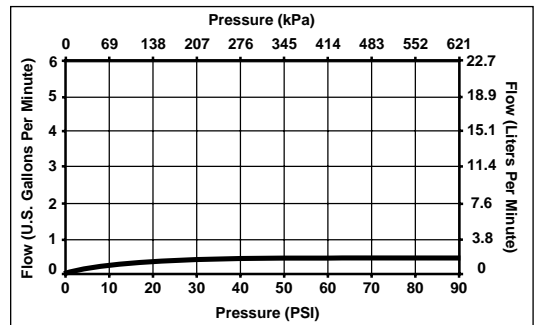

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselectonline.com for finish options and product availability.